


- 60** 60 CELLS
- P** POLY CRYSTALLINE
- 5** 5 BUS BAR
-  156,75 x 156,75 mm
6,17 x 6,17"
-  SILVER FRAME
-  WHITE BACKSHEET

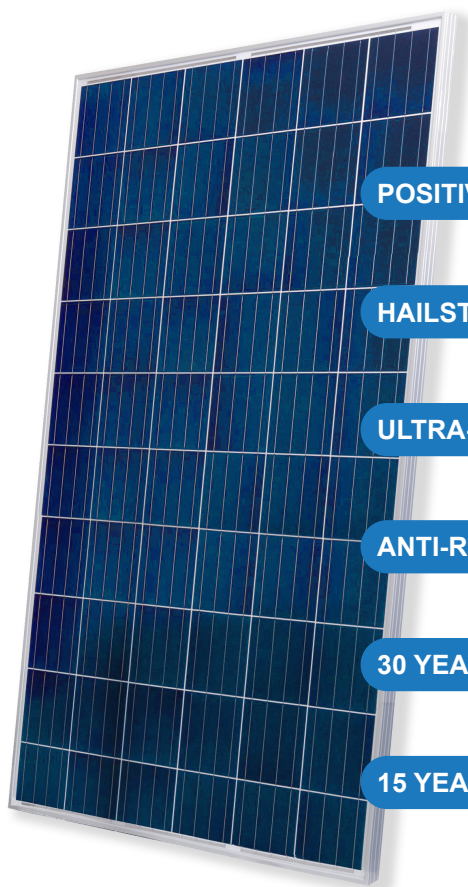

POSITIVE POWER OUTPUT TOLERANCE

HAILSTORM RESISTANCE

ULTRA-LIGHT ALUMINUM FRAME

ANTI-REFLECTIVE GLASS

30 YEARS LINEAR POWER WARRANTY

15 YEARS PRODUCT WARRANTY

POLY CRYSTALLINE SOLAR PANELS - 60 CELLS

TOP-REASONS TO CHOOSE OUR POLY CRYSTALLINE PANELS

A combination of quality and strenght

We offer 30-years warranty on the production output and 15-years warranty on the product defects. Our solar panels are made with sturdy materials and capable of withstanding high wind and snow loads.

We place great importance on your investment

Our panels always provide positive power tolerance and are competitively priced.

Flexibility is our added value

Thanks to the wide range of output powers our panels can be used for all kind of applications.

We provide certified "Made in EU" quality

Our panels are manufactured in Italy and endorsed by a qualified team.

ELECTRICAL CHARACTERISTICS (STC)*

	SC-290P
Nominal Output (Pmax)	290 W
Flash Test Power Tolerance	0/+5
Voltage at Pmax (Vmp)	32,2 V
Current at Pmax (Imp)	9,01 A
Open Circuit Voltage (Voc)	39,28 V
Short Circuit Current (Isc)	9,64 A
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	15 A
Module Efficiency	17,83 %

*STC (Standard Test Conditions): Irradiance 1000 W/m²; Module Temp. 25°C; Air Mass 1.5

MECHANICAL CHARACTERISTICS

Solar Cells	60 (6x10) poly crystalline	Diodes	3 Bypass diodes serviceable
Solar Cells Size	156,75x156,75 mm / 6.17x6.17"	Junction Box	IP67 rated
Front Cover	3.2 mm / 0.13" thick, low iron tempered glass	Connector	MC4 or compatible connector
Back Cover	TPT (Tedlar-PET-Tedlar)	Cables Length	900 mm / 35.43"
Encapsulant	EVA (Ethylene vinyl acetate)	Cables Section	4.0 mm ² / 0.006 in ²
Frame	Anodized aluminium alloy, double wall	Dimensions	1640x992x40 mm / 64.57x39.06x1.57"
Frame finishing	Silver	Weight	18 Kg / 39.68 lb
Backsheet finishing	White	Max. Load	Certified to 5400 Pa


TEMPERATURE CHARACTERISTICS

Temperature Coefficient of Pmax	-0.39 %/°C	Operating Temperature	-40 °C ~ +85 °C
Temperature Coefficient of Voc	-0.28 %/°C	NOCT**	45±2 °C
Temperature Coefficient of Isc	0.042 %/°C	**NOCT (Normal Operating Cell Temperature): Irradiance 800 W/m ² ; Air 20°C; Wind speed 1m/s	

PACKAGING

Pallet dimensions	1700x1200x1200 mm / 67x47x47"	Weight	516 Kg / 1138 lb
Pieces per pallet	27	Pallets Stacked	up to two

CURRENT/VOLTAGE CHARACTERISTICS

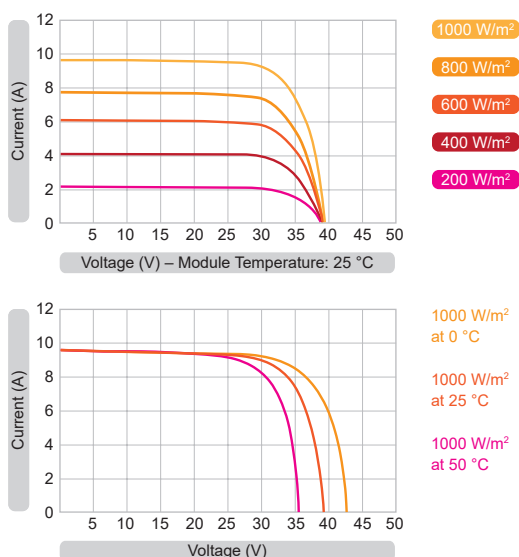

DIMENSIONS

